

Rugged Android Smartphone for RFID Applications

(A 5" Quad-Core, Industrial IP65 android device)

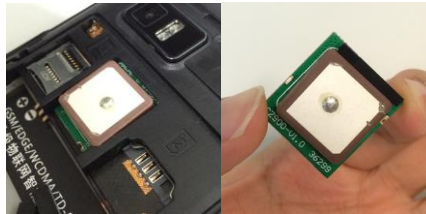
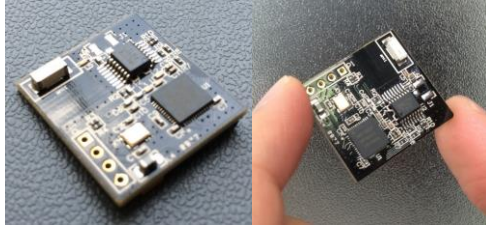
Optional module: Passive UHF RFID or 2.4GHz Active RFID module



Copyright© Hong Kong RFID Ltd. 2014, All rights reserved. Reproduction of any part is strictly prohibited.

Hong Kong RFID Limited

Unit 11, 9/F., Wah Wai Centre, 38-40 Au Pui Wan Street, Fotan, Shatin, N.T., Hong Kong.
Tel: (852) 3426 9511 Fax: (852) 3007 1901 Email: info@hk-rfid.com

QUICK Specification:	
Rugged Android Smartphone Cilico C5D A 5" Quad-Core, Industrial IP65 android device	
PN : HKRUR-C5DU-[X] [H]: HK & China Band: 920.0~925.0MHz [K]: Korea Band: 917.1 ~ 923.3 MHz [U]: US Band: 917.1 ~ 926.9 MHz [E]: EU Band: 865.1 ~ 867.9 MHz	PN : HKRAR-EM02-C5D
Rugged Android Smartphone C5D Installed with UHF RFID reader module 	Rugged Android Smartphone C5D Installed with 2.4Ghz Bluetooth Smart and 2.4GHz proprietary protocol 
<ul style="list-style-type: none"> ● RFID UHF ISO18000-6C, Class 1 Gen 2 tag reading, short to middle range less than 2 meters ● 2D-barcode scanner, WIFI, 3G, GPS, GPRS, Bluetooth ● No NFC 	<ul style="list-style-type: none"> ● Bluetooth Smart and 2.4GHz proprietary protocol (base on Nordic Semiconductor nRF51822) ● 2D-barcode scanner, WIFI, 3G, GPS, GPRS, Bluetooth ● supports Bluetooth® Smart protocol stacks as well as 2.4GHz protocol stacks ● no NFC
Standard functions: 3G, GPRS, GSM, WIFI, Bluetooth, 8MP Camera, GPS, accelerometer, light sensor, compass.	
Standard package: Charging Adapter (US plug or Europe Plug), USB Cable, Hand-strap, 4000mAh battery, Standard Package Box.	
Accessories: Cradle, 4000mAh battery, hand strap	
For detail specification regarding C5D, please refer to Cilico Official website: LINK .	

Detail feature follows the Cilico C5D rugged smartphone specifications;

Operation System	Android 4.2.2
CPU	Quad-Core ARM Cortex A7 1.3GHz
Graphics processor	Mali-400MP
Memory	1G RAM +4G ROM
Display	5" high-resolution Multi-touch screen; Resolution: 1280*720 dpi Gorilla Glass
Port	Micro USB2.0, support OTG
Memory interface	Micro SD card, expansion: 2G to 32G
Power	Li-Polymer 4000mAh Charging time: 5-6 hours
Communication	WLAN: support 802.11b/g/n mode and WEP.WPA/WPA2-PSK/WAPI PSK/802.1*EAP Encryption protocol 2G: GSM 850/900/1800/1900MHz 3G: WCDMA Bluetooth 2.1+ EDR
Camera	8.0 Mega Pixel rear camera;2.0 Mega Pixel front camera; Auto focus; with LED light
2D Barcode Scanner	Built-in Newland 2D laser barcode scanner engine;
GPS	Built-in GPS, support A-GPS
Physical	Weight: 300g (Include battery) Case: Black
Support	Gravity Sensor Electronic Compass Light Sensor Distance Sensor
Durability	Temperature in operation: -20 to 70°C Temperature in storage: -30 to 80 °C Humidity in operation: 5% - 90% (non-condensing) Humidity in storage: 5% - 95% (non-condensing)

For detail specification regarding C5D, please refer to Cilico Official website: [LINK](#).

Copyright© Hong Kong RFID Ltd. 2014, All rights reserved. Reproduction of any part is strictly prohibited.

Hong Kong RFID Limited

Unit 11, 9/F., Wah Wai Centre, 38-40 Au Pui Wan Street, Fotan, Shatin, N.T. , Hong Kong.
Tel: (852) 3426 9511 Fax: (852) 3007 1901 Email: info@hk-rfid.com